


Voltage	Nominal Power
12 V	1600 W
24 V	2200 W

Protection index: IP44
 Insulation class: F
 Type of winding: Compound
 Brushes kit: BK01 (12/1600) 200544138022
 BK02 (24/2200) 200544138023
 Minimum brushes length: 9 mm (0.35 inches)

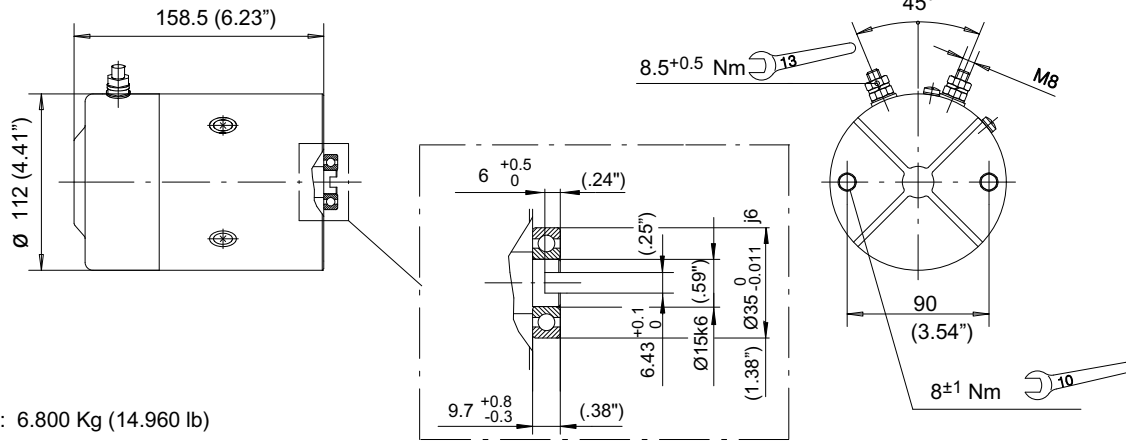


Weight: 6.800 Kg (14.960 lb)


Rotation Right	Motor		Motor with relay		Motor with thermal switch	
Type	C135AB/H0	C240AB/S0	C135AB/H0 +R109	C240AB/S0 +R215	C135AB/HT	C240AB/ST
Code	200543913706	200543924007	200763310240	200763320330	200543913502	200543924008
Relay			Standard			
Relay type			R109	R215		

Motor mounting positions


Standard positions

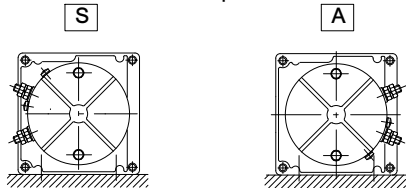

Standard positions

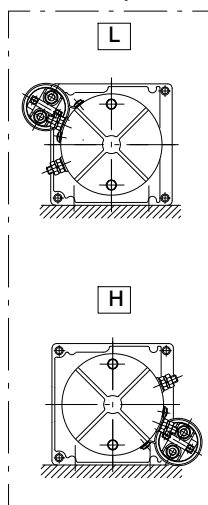

Relay mounting positions

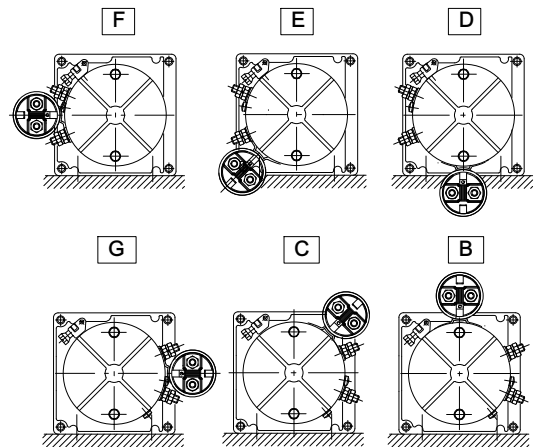

Electric motor										Pos.	
5	C	1	3	5	A	B	/	H	1	S	
Relay										Pos.	
R	1	0	9								L

Example