


SNV

taper and O-ring NBR* (e. g. Perbunan) on both sides

nuts on either side are retractable to back of O-ring groove, but only one at a time

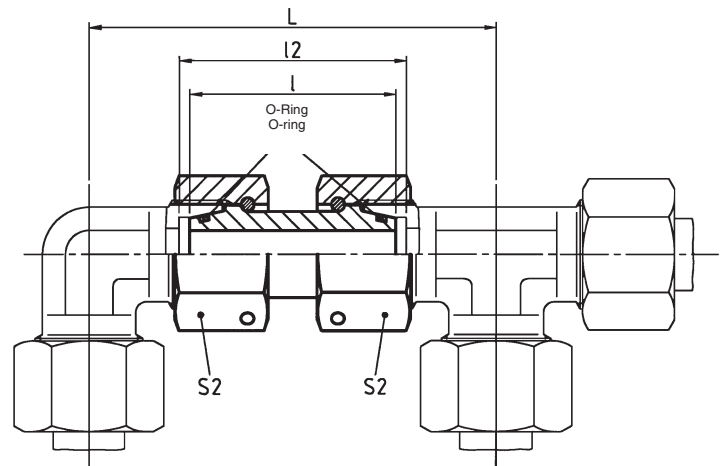

Series	bar	Tube OD	Type	Reference	L	l	l ₂	S ₂	O-ring
									*O-Ring
L	500 (7252)	6	SNV 6 L	WAL372938	60	34	36	17	4,5 x 1,5
		8	SNV 8 L	WAL372939	64	34	36	17	6 x 1,5
		10	SNV 10 L	WAL372940	67	36	37	19	8,5 x 1,5
	400 (5801)	12	SNV 12 L	WAL372941	71	36	37	22	10 x 1,5
		15	SNV 15 L	WAL372942	82	39	40	27	12 x 2
		18	SNV 18 L	WAL372943	89,5	40,5	42,5	32	15 x 2
		22	SNV 22 L	WAL372944	101,5	45	46,5	36	20 x 2
	250 (3626)	28	SNV 28 L	WAL372945	109,5	47	48,5	46	26 x 2
		35	SNV 35 L	WAL372946	126,5	53	57,5	50	32 x 2,5
		42	SNV 42 L	WAL372947	138,5	53	58,5	60	38 x 2,5
S	800 (11603)	6	SNV 6 S	WAL372948	71	37	39	17	4,5 x 1,5
		8	SNV 8 S	WAL069234	73	37	39	19	6 x 1,5
		10	SNV 10 S	WAL068948	78	41	43	22	8,5 x 1,5
	630 (9137)	12	SNV 12 S	WAL068950	87	42	44	24	10 x 1,5
		14	SNV 14 S	WAL372949	92	45	48	27	12 x 2
		16	SNV 16 S	WAL068088	99	46	50	30	14 x 2
	420 (6091)	20	SNV 20 S	WAL068090	112,5	55	59,5	36	17,3 x 2,4
		25	SNV 25 S	WAL061763	125,5	58	65,5	46	22,3 x 2,4
	400 (5801)	30	SNV 30 S	WAL068099	143,5	62	72,5	50	27,3 x 2,4
		38	SNV 38 S	WAL061765	164,5	67	82,5	60	35 x 2,5