



Hydraulic top link

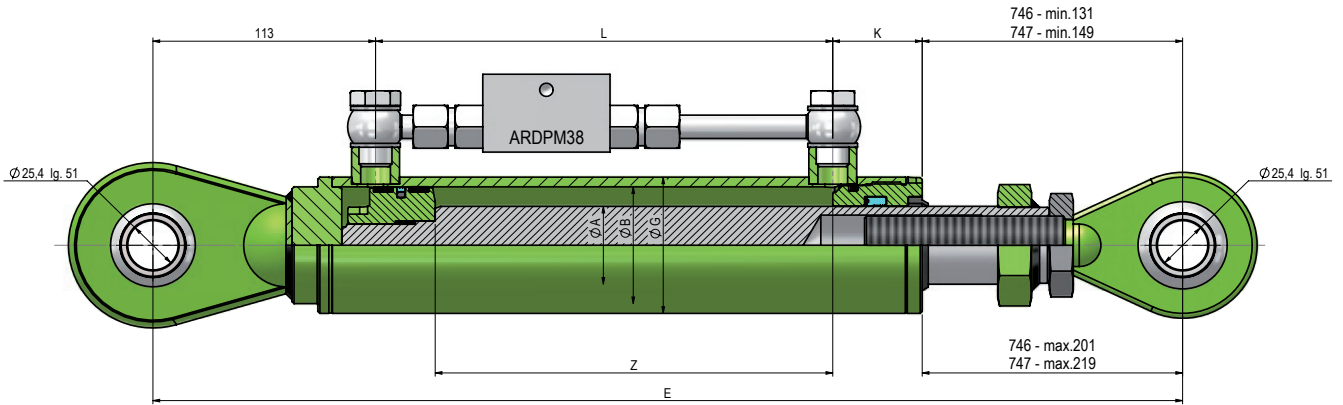

REF.	ØA	ØB	STROKE Z	E	G	K	L	WEIGHT (kg)	SEALS JOINTS
746AAR	40	60	200	518	70	45	229	9,93	J4060N
746BAR	40	60	250	568	70	45	279	10,93	J4060N
746CAR	40	60	300	618	70	45	329	11,80	J4060N
747AAR	45	70	200	544	80	49	231	12,21	J4570N
747BAR	45	70	250	594	80	49	281	13,36	J4570N
747CAR	45	70	300	644	80	49	331	14,51	J4570N

Option: Without dual pilot operated check valve set
Sturdy construction, high shock resistance
Screw-adjustable closed length

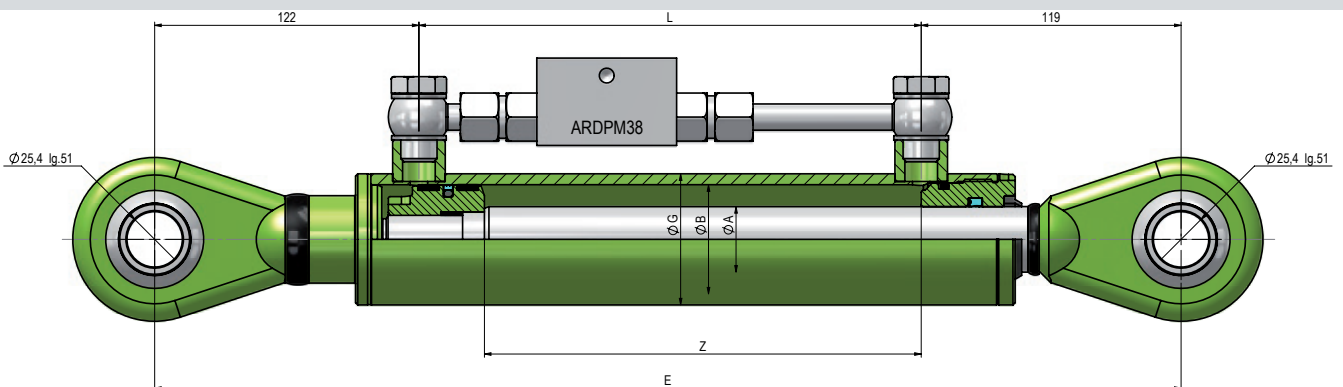

HYDRAULIC TOP LINK 30-50

REF.	ØA	ØB	ØG	STROKE Z	E	WEIGHT (kg)	SEALS JOINTS
745AAR	30	50	60	200	470	7,94	J72N
745DAR	30	50	60	280	550	8,97	J72N

