


REF.	ØA	ØB	STROKE Z	E	F	G	H	ØD	VOL (L)	WEIGHT (kg)
845A25	45	70	210	610	241	80	49	25	0,81	21,3
845A28	45	70	210	610	241	80	49	28	0,81	21,5
845A32	45	70	210	610	241	80	49	32	0,81	21,5
845B25	45	70	250	650	281	80	49	25	0,96	22,2
845B28	45	70	250	650	281	80	49	28	0,96	22,4
845B32	45	70	250	650	281	80	49	32	0,96	22,4
850A25	50	90	210	625	252	105	60	25	1,34	28
850A28	50	90	210	625	252	105	60	28	1,34	28,2
850A32	50	90	210	625	252	105	60	32	1,34	28,2
850B25	50	90	250	665	292	105	60	25	1,59	29,4
850B28	50	90	250	665	292	105	60	28	1,59	29,6
850B32	50	90	250	665	292	105	60	32	1,59	29,6

Optional

Dual pilot operated check valve set (Ref. ARDP).

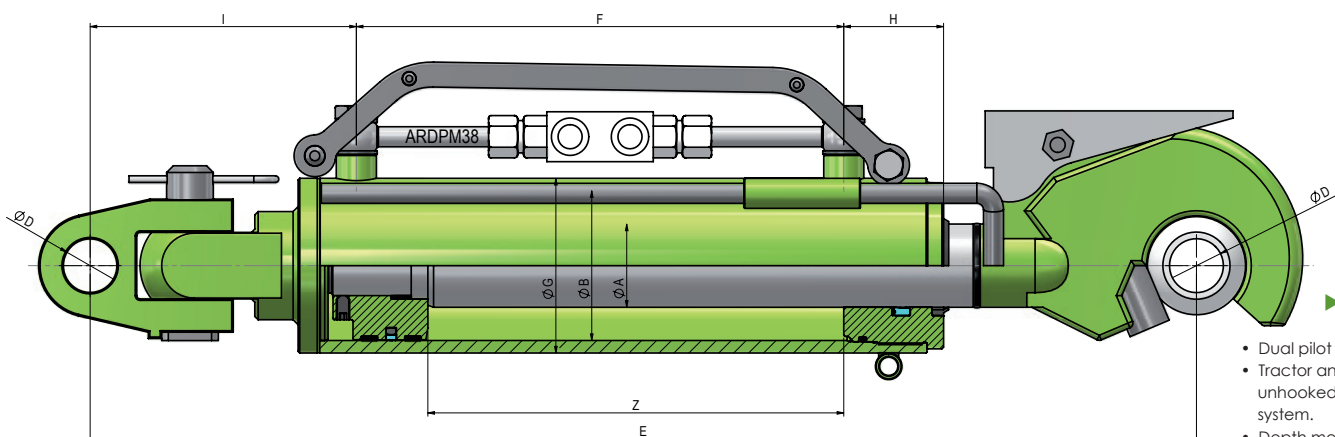

► Including:

- Dual pilot operated check valve.
- Tractor anchoring system when unhooked to the tool. Reversible system.
- Depth measuring ruler.

REF.	ØA	ØB	STROKE Z	E	F	G	H	I	ØD	VOL (L)	WEIGHT (kg)
850BSP	50	90	250	665	292	105	60	161	32	1,59	29